

# CITIZEN

## Well protected

High speed printing with unique ease of use



CT-S651II

### LED operation panel

The three color LED indicates the printer's status, types of errors and messages.

### Toolfree maintenance

Paper jam? No problem for the CT-S651II. One hand grip and the cutter is released automatically. No tool is needed. Even if the longlife cutter ever needs to be exchanged. Thanks to its Snap-In design this only takes 30 seconds.

### Internal Power Supply

The CT-S651II POS printer from Citizen offers an internal power supply.

## CITIZEN CT-S651II


POS

### Applications

- Hospitality
- Receipt
- Coupon
- Ticket
- Restaurant / Bar
- Kitchen
- Delivery slip
- Barcode
- Weigh scales
- Kiosk
- Queue management



Operation panel

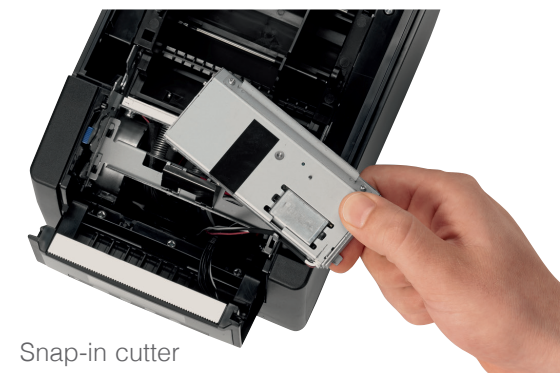

Snap-in cutter

CITIZEN SYSTEMS JAPAN CO., LTD.

# CITIZEN

## Accessories/ Interface Connections

- Serial IF1-RS01
- Parallel IF1-PA01
- USB IF1-UB01
- Powered USB IF1-PU01
- USB incl. USB hub IF1-HU01
- Ethernet (Standard) IF1-ET01

## Specifications

Model	CT-S651II	
Printing method	Line thermal dot printing	
Printing width	280mm/640 dots, 72mm/576 dots, 64mm/512 dots, 54.5mm/436 dots, 54mm/432 dots, 52.5mm/420 dots, 48mm/384 dots, 45mm/360 dots, 48.75mm/390 dots, 68.25mm/546 dots	
Dot pitch	8 x 8 dots/mm (203 dpi)	
Printing speed	Max. 220mm/s (print density 100%), 1600 dot-lines/s	
Number of columns	83mm paper: Font A – 53, Font B – 71, Font C – 80, 80mm paper: Font A – 48, Font B – 64, Font C – 72, 60mm paper: Font A – 36, Font B – 48, Font C – 54, 58mm paper: Font A – 35, Font B – 46, Font C – 52	
Character size	Font A: 1.50 x 3.00mm (12 x 24 dots), Font B: 1.13 x 2.13mm (9 x 17 dots), Font C: 1.00 x 2.00mm (8 x 16 dots)	
Character table	Alphanumeric, international, PC437/850/852/857/858/860/863/864/865/866/WPC1252/katakana/Thai code 18	
Barcode type	UPC-A/E, JAN-13/8, Code 39, Code 128, CODABAR, Code 93, PDF417, QR Code	
Logo registration/print	384 KB (capable of storing user-defined characters and logos)	
Line spacing	4.23mm (1/6 inch), can be set by command	
Paper	Width	83mm/80mm/60mm/58mm (all +0/-1mm)
	Diameter	maximum 83mm
	Thickness	65-75µm (core tube diameter: inner 12mm/outer 18mm) 75-150µm (core tube diameter: inner 25.4mm/outer 32mm)
	Recommended Paper	TF-50KS-E-2D from Nippon Paper, PD150R or PD160R from Ohji Paper, PA220AG, HP220A, HP220AB-1, F230AA, P220AB, or PB670 (2-color paper) from Mitsubishi Paper
Interface	Serial (RS-232C compliant), parallel (IEEE 1284 compliant), USB, USB with hub, Ethernet, Wireless LAN (Wifi), powered USB, Bluetooth	
Input buffer	4K bytes/45 bytes	
Drawer kick-out	2 drawers	
Operation panel	3 LED's, Feed button	
Power supply	Input: AC 100 to 240V, 50/60 Hz, 150 VA, Output: DC 24, 2.1 A	
Weight	CT-S651IIS: Approx. 2 kg, CT-S651IIA: Approx. 1.6 kg	
Dimensions (W x D x H)	CT-S651IIS: 145 x 192 x 148 mm, CT-S651IIA: 145 (W) x 192 (D) x 120 (H) mm	
Operating environment	5 to 45°C, 10 to 90% RH (no condensation)	
Storage environment	-20 to 60°C, 10 to 90% RH (no condensation)	
Reliability	Print head life: 150km, 200 million pulses (at normal temperature and humidity using recommended paper), Auto cutter life: 2 million cuts (at normal temperature/humidity, using recommended paper and paper thickness)	
EMC and safety standards	UL, C-UL, FCC Class A, TUV-Bauart, CE Marking, VCCI, CCC, BIS	
Warranty	2 years for Printer	




All product names are trademarks of the respective manufacturers. Epson® and ESC/POS™ are trademarks or registered trademarks of Seiko Epson Corporation. Designs, specifications and availability are subject to change without notice. Errors and omissions excluded. CITIZEN is a registered trademark of Citizen Watch Co., Ltd. Japan

2017 Rev. 1.0




Exchangeable interfaces

## Customization Software

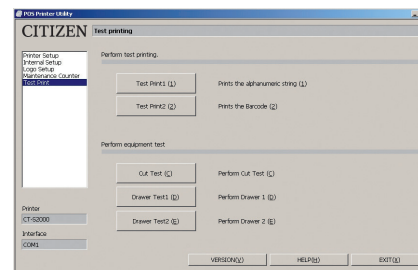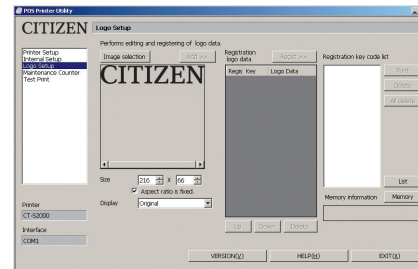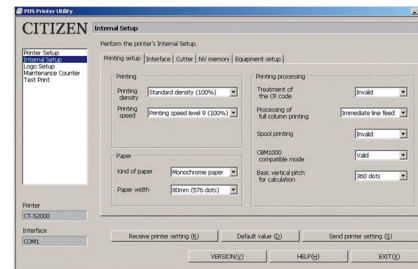

# CITIZEN CT-S651II

POS



## Features & Benefits

- 220mm / sec high-speed printing
- 82,5/80/60/58 mm selectable paper width
- Easy paper loading
- Auto retracting Cutter (full/partial)
- Snap-in cutter
- Operation panel with 3 LED's and feed button
- Built-in buzzer
- Front paper exit
- Paper roll capacity Ø 83mm
- Exchangeable interface cards
- Built-in AC adaptor
- Cash drawer kick-out
- Bitmap registration (NV memory)
- Barcode printing
- ESC/POS compatibility
- Page mode
- Two color printing
- Smoothing fonts
- Available in white, black or dark grey (option)
- Driver: Win2000/XP/Vista/2003 Server, OPOS, Java POS, CUPS
- Utility software: Printer customization software, Receipt Layout Designer

CITIZEN SYSTEMS JAPAN CO., LTD.